



600 Lemens Ave, Ste 700  
 Hutto, TX 78634  
 Phone/Fax: 844 OP TITAN (678-4826)  
 www.titanopfab.com  
 orders@titanopfab.com

# TT CHECK SOCKET WORKORDER

Date needed IN OFFICE

PO

Company Name: \_\_\_\_\_ Contact/Number: \_\_\_\_\_

Address: \_\_\_\_\_ City, State Zip: \_\_\_\_\_

Bill To: \_\_\_\_\_ Account #: \_\_\_\_\_ Contact: \_\_\_\_\_

### REQUIRED PATENT INFORMATION

Patient Name: \_\_\_\_\_ Height: \_\_\_\_\_ Weight: \_\_\_\_\_

Our guarantee requires completed work order, measurements and alignment lines. Completion of this work order will enable us to provide you the highest level of quality fabrication. Incomplete orders and/or ordering parts/components will add to your fabrication time of the order.

#### Side

- Left       Right

#### Shape

- Shape by Cast  
 Shape by App Scan  
 Shape by CAD File: \_\_\_\_\_

#### Socket Style

- Total Surface Bearing  
 Patellar Tendon Bearing

Total Reduction \_\_\_\_\_% \_\_\_\_\_ Ply

- Distal     Proximal     Overall

Standard reduction is 3% unless specified

#### Alignment

Flexion \_\_\_\_\_ Adduction \_\_\_\_\_

If not specified, 0° is standard

#### Material

- Bulldog Tools Ringmaster® (Vivak)  
 Orfitrans™ Stiff  
 Other: \_\_\_\_\_


#### Brim Style

- Total Surface Bearing Trim  
 Patellar Tendon Bearing Trim  
 Soderberg Trim  
 Other \_\_\_\_\_

Titan Provide Distal Attachment: Yes or No

#### Distal Options

- No Attachment  
 Leave Distal Void for Pin/Lanyard System Later  
 Other \_\_\_\_\_

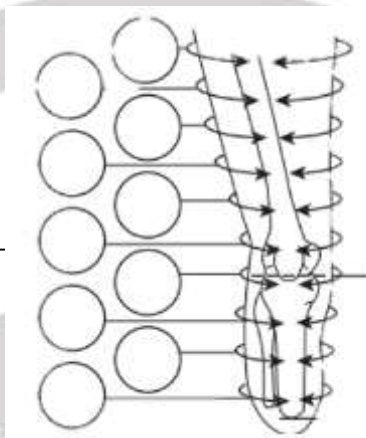

#### Circumferences (in MILLIMETERS)

- 8 inch \_\_\_\_\_  
 6 inch \_\_\_\_\_  
 4 inch \_\_\_\_\_  
 2 inch \_\_\_\_\_  
 Knee Center \_\_\_\_\_  
 2 inch \_\_\_\_\_  
 4 inch \_\_\_\_\_  
 6 inch \_\_\_\_\_  
 8 inch \_\_\_\_\_

- Check here to receive foam carving from this order

#### Distal Attachment

- Bulldog Tools 3 GEN A Pin Lock  
 Four Hole Adapter (Bulldog Tools FHLA-24)  
 Bulldog Threaded 4 Hole ( FHLA-16 or FHLA-10 )  
 Ossur 544 Plate Kit (Valve Included)  
 Coyote Designs Air Lock (CD103/CD103AF)  
 Other \_\_\_\_\_

#### Liner Option Expulsion

- BK Lyn Valve  
 Other \_\_\_\_\_

#### Flexible Liner Option

##### Thickness

- 1/8     3/16     ¼  
 OP-TEK™ Clear (OP Flex)  
 OP-TEK™ White (OP Comfort)  
 OP-TEK™ Black (OP Flex Black)

#### Foam Liner

- Keasy Cone  
 Other \_\_\_\_\_